

Toro Vision I Controllers

Toro Vision I Controllers

Features

- Solid-state design with hybrid at-a-glance programming interface
- 6, 9 or 12 stations
- Up to 3 start times per day
- Station run times:
- 1 to 90 minutes (all stations) or 10 minutes to 9 hours (select stations)
- 14-day programming, by day of week
- Interval programming — every day, every other day — up to 7 days between watering
- Watering Delay— 1- to 4-day program cancellation with auto resume
- Battery backup for program protection during power failures
- Manual start of each station or entire program
- Terminal strip hot post for easy valve actuation/identification
- System On/Off switch
- Fuse-protected circuitry
- Weather-resistant, plastic cabinet, wall mounted

Electric Specifications


Input power:

- 117 V a.c. 50/60 Hz
 - .12 amps (14 W) idle
 - .25 amps (29 W) maximum operating load
- Output power:
 - .35 amps (8 VA) per station
 - .20 amps (5 VA) per pump/master valve
 - .60 amps (14 VA) total combined load
- UL listed, CSA certified

Mechanical Specifications

- Dimensions: 12 15/16" H x 8 7/8" W x 3 1/4" D
- Main power in: 1/2" conduit access hole
- Valve power out: 1" conduit access hole

Programming is as simple as setting an alarm clock with these advanced hybrid residential controllers designed with solid-state precision.

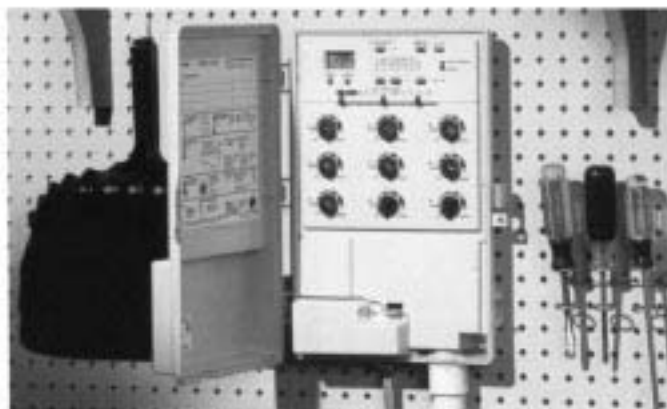

Ordering Information Toro Vision I Controllers

Part #	Description	List Price	Ctn. Qty.
188-66-12	6 Stations, Plastic Cabinet, Plug-in Transformer	180.00	1
188-96-12	9 Stations, Plastic Cabinet, Plug-in Transformer	228.00	1
188-06-12	12 Stations, Plastic Cabinet, Plug-in Transformer	305.00	1
188-66-02	6 Stations, Plastic Cabinet, Internal Transformer	180.00	1
188-96-02	9 Stations, Plastic Cabinet, Internal Transformer	228.00	1
188-06-02	12 Stations, Plastic Cabinet, Internal Transformer	305.00	1